

R. D. **WERNER** CO. INC.**ALUMINUM LADDERS •****500 SERIES SINGLE AND EXTENSION LADDERS**Featuring **ALFLO**  
**HYDRO-LOCKED**  
**RUNG-JOINTS**

AN EXCLUSIVE WERNER FEATURE

Rungs are hydraulically locked into the rails by the WERNER unique "ALFLO" process—a distinctive advance in ladder engineering—developed, perfected and tested in WERNER'S own Research and Development Department. Rungs cannot loosen in service.

Side rail channel-type extrusions redesigned to insure maximum strength and safety at minimum weight per foot. Smoother action between the inter-lock sliding channels.

Rungs are a full 1 1/4" in diameter with deeper corrugations for added safety and greater comfort.


Width of ladder increased by a full 2 inches for greater safety and stability at any height.

**ONLY ALUMINUM LADDER WITH UNDERWRITERS LABORATORY LABEL****SPECIFICATIONS FOR 500 SERIES**



Diameter of rungs . . . . . 1 1/4"  
Inside width between rails—Base Section . . . . . 14 1/2"  
Fly Section & Single Ladders . . . . . 14 1/2"  
First Rung from bottom . . . . . 7 1/2"  
Last Rung from top . . . . . 7 1/2"  
Rung Spacing . . . . . 12" centers  
Safety Locks . . . Aluminum Automatic Spring Loaded

**500-SERIES SINGLE LADDERS**


Style No.	Size	Approx. Weight	Width of Side Rail	Price
27P-508-C	8'	12 1/4 lbs.	3" x 3/4"	\$14.05
27P-510-C	10'	15 lbs.	3" x 3/4"	17.80
27P-512-C	12'	17 1/2 lbs.	3" x 3/4"	21.25
27P-514-C	14'	20 1/4 lbs.	3" x 3/4"	24.65
27P-516-C	16'	26 1/4 lbs.	3" x 3/4"	34.25
27P-518-C	18'	30 lbs.	3" x 1"	38.35
27P-520-C	20'	33 lbs.	3" x 1"	42.45

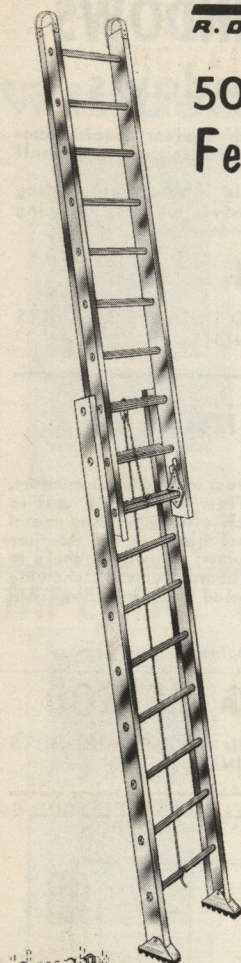


**AUXILIARY STEP REST**  
No. 27P-10-M  
\$3.67



Inter-Locking U-Channels provide free-sliding, smooth action that can't bind or collect dirt.




Cut away Section shows rung joints hydro locked through exclusive Werner Alflo process.



Free Swinging Safety Shoes swivel on large bearing bolts and have slip-resistant neoprene treads.




End Caps covered with protective red vinyl plastic prevent marring of any surface, and make handling easier.



Positive Acting Automatic Spring Loaded Gravity-Type, Aluminum Cast Safety Locks.

**500 SERIES (2 SECTION) EXTENSION LADDERS**

Style No.	Size	Approx. Wt.	Base Section	Fly Section	Width of Side Rail	Overlap	Working Lgth.	Price
27P-520-2-C	20'	32 lbs.	10'	10'	3" x 3/4"	3'	17'	\$37.00
27P-524-2-C	24'	38 lbs.	12'	12'	3" x 3/4"	3'	21'	44.50
27P-528-2-C	28'	43 lbs.	14'	14'	3" x 3/4"	3'	25'	51.35
27P-530-2-C	30'	53 lbs.	16'	14'	3" x 3/4"	3'	27'	65.75
27P-532-2-C	32'	57 lbs.	16'	16'	3" x 3/4"	3'	29'	70.55
27P-536-2-C	36'	63 lbs.	18'	18'	3" x 1"	3'	33'	79.45
27P-540-2-C	40'	69 lbs.	20'	20'	3" x 1"	4'	36'	86.30

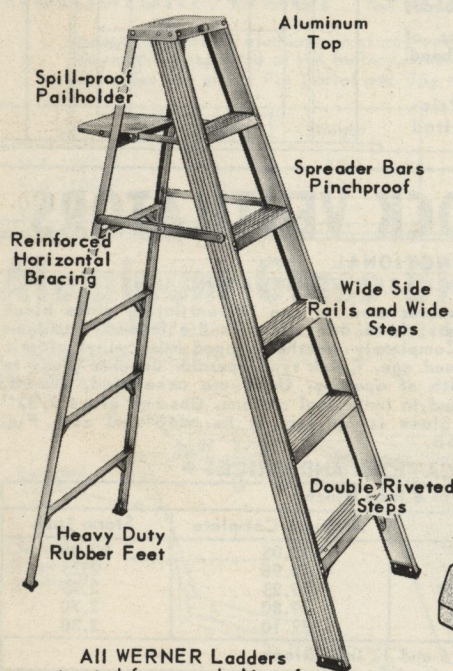**WERNER ALUMINUM 400 AND 700 SERIES STEPLADDERS**

Aluminum Top

Spill-proof Pailholder

Spreader Bars Pinchproof

Reinforced Horizontal Bracing

Wide Side Rails and Wide Steps

Double Riveted Steps

Heavy Duty Rubber Feet

All WERNER Ladders constructed from tough Aircraft type Aluminum Extrusions

Low priced. Built for lifetime safety and service. For mechanics, painters, electricians, etc. Light enough for any housewife to handle. Wide corrugated slip-resistant steps and side rails. Ample spread and pitch gives maximum stability at all heights. Double-riveted construction, extra bracing on bottom steps — horizontal cross bracing on rear assembly. Spill-proof pail-holder and top step pinch-proof spreader bars, heavy duty rubber feet.

**400 SERIES STEP LADDERS**

No.	Height	Ship. Weight	Price
27P-404-C	4 ft.	13 1/2 lbs.	\$13.70
27P-405-C	5 ft.	17 lbs.	15.75
27P-406-C	6 ft.	20 1/2 lbs.	20.55
27P-408-C	8 ft.	25 1/2 lbs.	28.75

**700 SERIES STEP LADDERS**

No.	Height	Ship. Weight	Price
27P-704-C	4 ft.	14 lbs.	\$15.75
27P-705-C	5 ft.	17 1/2 lbs.	18.50
27P-706-C	6 ft.	22 1/2 lbs.	23.95
27P-708-C	8 ft.	29 lbs.	32.20
27P-710-C	10 ft.	36 lbs.	39.05
27P-712-C	12 ft.	44 1/2 lbs.	51.40

• **SPECIFICATIONS •**  
**400 SERIES**

Front Rail 3-1/16" wide x 3/4" deep U-channel. Steps 3" wide x 1-1/4" deep.


**700 SERIES**

Front rail 3-9/16" wide x 3/4" deep U-channel. Steps 3-1/2" wide x 1-1/4" deep.

**FOR BOTH SERIES**

Step spacing — 12" on centers. Double riveted steps with step braces on bottom steps. Rear rails — 1" x 1" x 3/32" angle on models through 5'; 1" x 1" x 1/8" angle on models through 6'; 1" x 1-1/4" x 5/32" angle on 8'-10'-12' models, cross braces — 13/16" x 1-1/2" x 3/32" angle. Double riveted rear rails. Ladder top — 5-3/4" x 12-1/8". Bucket holder — 8" x 9-7/8".


4' to 6' step ladders and platforms are packed in individual shipping cartons.



Improved Bucket Holder — 8" x 9-7/8" — holds pails up to one gallon size; spill-proof design.



Ribbed-Rubber Feet are standard equipment on all sizes — slip resistant, won't mar floors.



Handy "Tool-Tra Top" — holds bolts and screws — tools can't roll off and cause accidents.

ALL ITEMS ON THIS PAGE F.O.B. OUR ST. LOUIS OR CHICAGO WAREHOUSE

Materials Wholesale from **MORGAN - WIGHTMAN**